


FlexPackPRO[®]

Thermal Transfer Overprinting

130 SERIES

32mm TTO Coders

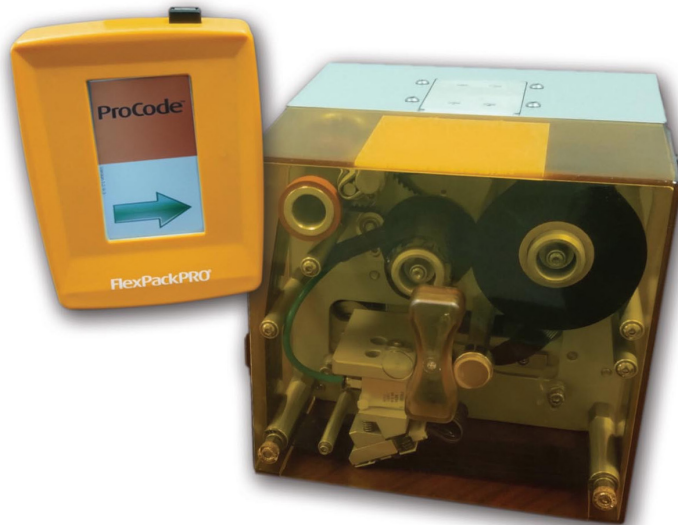


RUGGED

- Built with 7000 series aircraft-grade treated aluminum alloy and stainless steel.
- Vertically-integrated parts manufacturing to ensure quality control and precision assembly.
- Heavy-duty installation brackets and rollers crafted in-house to customer specifications.
- Robust long-life mechanical design requiring zero preventative maintenance.

RELIABLE

- Clutchless ribbon drive and tension control design maximize uptime and long-term performance.
- Superior Festo[®] pneumatics assure image quality control & longer printhead life.
- Precision printhead assembly requires lower air pressure to achieve highest print quality.
- 300dpi Kyocera[®] printheads on self-leveling mounts provide superior code quality through every run.

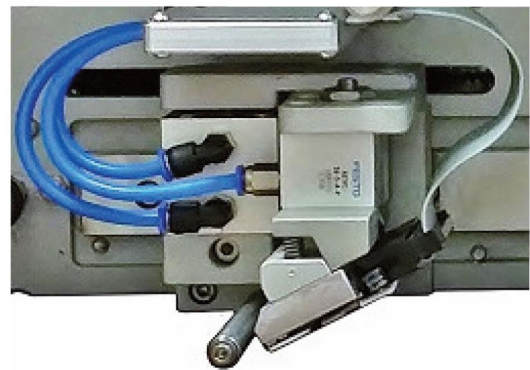

VALUE


- Color LCD touchscreen controllers with WYSIWYG print preview come standard with all models.
- Full-featured, highly-intuitive ProCode[®] image design software comes free with all systems.
- Reasonably-priced ribbons, parts and service provide the industry's lowest total cost of ownership.
- On average, complete FlexPackPRO systems list for 25-40% lower than competitive TTO systems of comparable quality.

Rugged. Reliable. Value.[™]


FlexPackPRO[®] Thermal Transfer Overprinting 130 SERIES

Models:	130i	130i-hp	130c	130c-hp
Printer Mode:	Intermittent	Intermittent	Continuous	Continuous
Maximum Print Area (Width x Length):	32 x 50 mm (1.26 x 1.97 in)	32 x 70 mm (1.26 x 2.76 in)	32 x 125 mm (1.26 x 4.93 in)	32 x 125 mm (1.26 x 4.93 in)
Print Resolution:	300 dpi	300 dpi	300 dpi	300 dpi
Print Speed:	50 - 400 mm/second (2 - 15.75 in/second)	50 - 400 mm/second (2 - 15.75 in/second)	50 - 550 mm/second (2 - 21.70 in/second)	50 - 600 mm/second (2 - 23.62 in/second)
Est. Max. Throughput (Single Line):	300 packs/min	300 packs/min	400 packs/min	400 packs/min
Print Gap:	0.5 mm (0.02 in)	0.5 mm (0.02 in)	0.5 mm (0.02 in)	0.5 mm (0.02 in)
Ribbon Widths:	Min: 20 mm (0.8 in) Max: 35 mm (1.38 in)	Min: 20 mm (0.8 in) Max: 35 mm (1.38 in)	Min: 20 mm (0.8 in) Max: 35 mm (1.38 in)	Min: 20 mm (0.8 in) Max: 35 mm (1.38 in)
Maximum Ribbon Length:	680 m (2,230')	680 m (2,230')	680 m (2,230')	680 m (2,230')
Ribbon Saver Features:	Yes	Yes	Yes	Yes
Ribbon Loading:	Direct (Non-Cassette)	Integrated Cassette	Direct (Non-Cassette)	Integrated Cassette
Standard User Interface:	4.3 inch color LCD touchscreen	4.3 inch color LCD touchscreen	4.3 inch color LCD touchscreen	4.3 inch color LCD touchscreen
Software:	ProCode™ Image Design Software (with conversion capability)	ProCode™ Image Design Software (with conversion capability)	ProCode™ Image Design Software (with conversion capability)	ProCode™ Image Design Software (with conversion capability)
Barcodes:	1D, 2D, Data Matrix, QR, EAN 8, EAN 13, EAN 128, Code 39, Code 93, Code 128, UPC-A, UPC-E, PDF 417, ISBN, ITF, GS1, Other	1D, 2D, Data Matrix, QR, EAN 8, EAN 13, EAN 128, Code 39, Code 93, Code 128, UPC-A, UPC-E, PDF 417, ISBN, ITF, GS1, Other	1D, 2D, Data Matrix, QR, EAN 8, EAN 13, EAN 128, Code 39, Code 93, Code 128, UPC-A, UPC-E, PDF 417, ISBN, ITF, GS1, Other	1D, 2D, Data Matrix, QR, EAN 8, EAN 13, EAN 128, Code 39, Code 93, Code 128, UPC-A, UPC-E, PDF 417, ISBN, ITF, GS1, Other
Standard Communication:	RS232, Ethernet, USB	RS232, Ethernet, USB	RS232, Ethernet, USB	RS232, Ethernet, USB
Printer Dimensions (Height x Width x Depth):	175 mm x 190 mm x 200 mm (6.89 in x 7.48 in x 7.87 in)	180 mm x 220 mm x 222 mm (7.09 in x 8.66 in x 8.74 in)	175 mm x 190 mm x 200 mm (6.89 in x 7.48 in x 7.87 in)	180 mm x 220 mm x 222 mm (7.09 in x 8.66 in x 8.74 in)
Printer Weight:	5.6 kg (12.3 lbs)	9.4 kg (20.7 lbs)	5.6 kg (12.3 lbs)	9.4 kg (20.7 lbs.)
Power Supply:	110 - 120 / 200 - 240 VAC, 50 / 60 Hz	110 / 200 - 240 VAC, 50 / 60 Hz	110 - 120 / 200 - 240 VAC, 50 / 60 Hz	110 / 200 - 240 VAC, 50 / 60 Hz
Air Supply:	4 bar / 60 psi (max) Dry, Uncontaminated	4 bar / 60 psi (max) Dry, Uncontaminated	4 bar / 60 psi (max) Dry, Uncontaminated	4 bar / 60 psi (max) Dry, Uncontaminated
Operating Temperature:	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)


Controller:



130i / 130c Printers:



130i-hp / 130c-hp Printers:



Specifications deemed accurate at the time of publication, and are subject to change without notice. Performance may differ based on individual application.

FlexPackPRO[®] Thermal Transfer Overprinting

CORPORATE LOCATIONS
GEORGIA | ILLINOIS | NEW JERSEY

(800) 758-9219
gopro@flexpackpro.com
www.flexpackpro.com

Call (800) 758-9219 x 117 to discuss your coding application and find a FlexPackPRO[®] distributor near you.



SUPPORTED BY A
**NATIONAL
SALES & SERVICE
NETWORK**