

HOT MELT HOSES


Ample Diameter & Length Ranges

Proven stability.

Because of new and advanced designs, Valco Melton is able to offer a larger range of hot melt hoses with improved market standard adaptability. Melton® hoses are the ideal solution for quality hot melt transport and optimal benefits.

Valco Melton's Hot Melt Hoses Offer:

- *Compatible*
- Flexibility
- Interchangeability
- Versatility & dependability for all applications
- Proven design & quality guaranteed
- Long lasting design to remain "char" free
- "Nomex" insulation for the best insulation and temperature stability in the industry

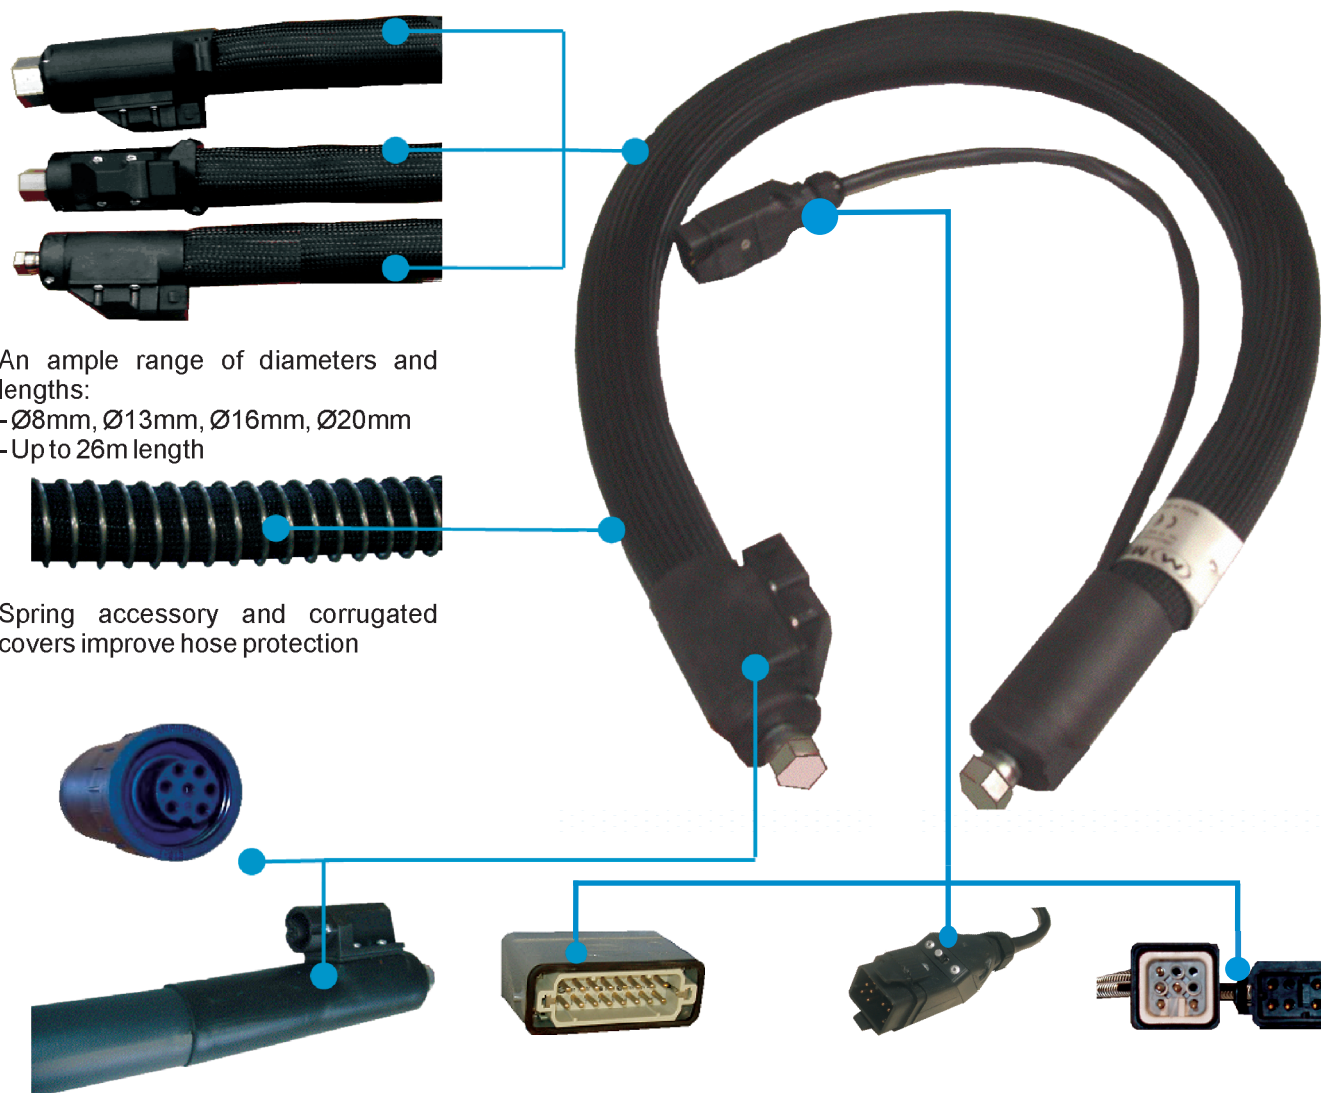

An ample range of diameters and lengths:
 -Ø8mm, Ø13mm, Ø16mm, Ø20mm
 -Up to 26m length


Spring accessory and corrugated covers improve hose protection

Waterproof option available with specialty fittings and rubber covers for humid environments.

HP hoses support high power values and improve mechanical resistance.

NEW Dual RTD Hot Melt Hoses.

Electrical connections are compatible with market standards.

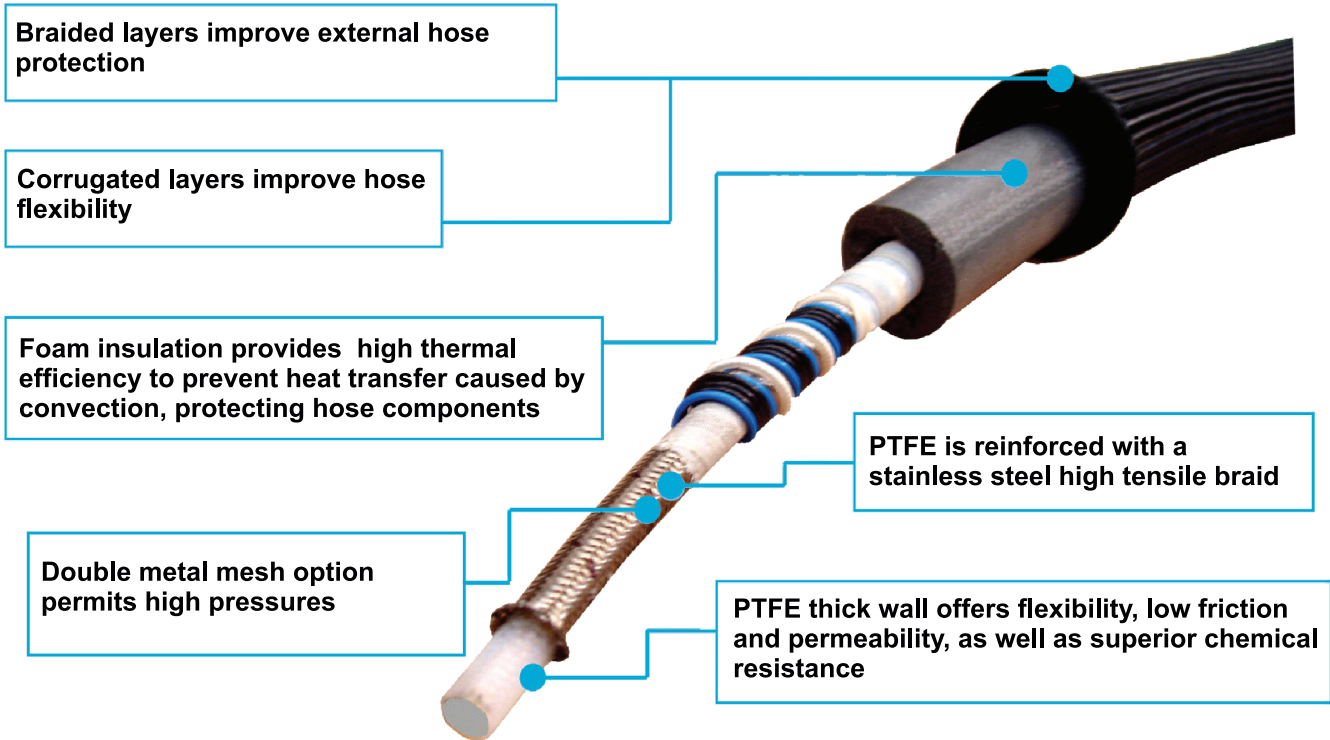

- Valco Melton manufactures hot melt hoses using top of the line market components that are 100% mechanically and electronically interchangeable.
- Hot Melt Hoses are temperature sensed by Ni-120 or PT-100 Rtd.
- Accessories include brackets, fittings, hose protectors, corrugated and braided covers.
- Valco Melton products are CE certified.

Technical Characteristics

| Characteristics | Hot Melt Hoses | | | |
|---|--------------------------------|-----|-----|-----|
| Maximum Working Temperature: | 220°C | | | |
| Internal Diameter (mm): | Ø8 | Ø13 | Ø16 | Ø20 |
| Maximum Working Pressure (bar): | 100 | 100 | 100 | 80 |
| Power Consumption (W/m): | 150 | 175 | 195 | 200 |
| RTD: | PT-100/ NI-120/ NTC 1000/ FEKO | | | |
| Minimum Curvature Radius (180°): | 160 mm | | | |
| Voltage: | 200-240 VAC | | | |



For more information, visit www.valcomelton.com or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel: 513.874.6550 • Fax: 513.874.3612

European Headquarters: Spain, Navarra • Tel: +34.948.321.580 • Fax: +34.948.326.584

Asian Headquarters: China, Xiamen, Fujian • Tel: +86.592.591.7854 • Fax: +86.592.591.7834

info@valcomelton.com • Serving Over 76 Countries Worldwide. • www.valcomelton.com.